

Serie
Series

VSS

BOMBAS CENTRIFUGAS VERTICALES SEMISUMERGIDAS

VERTICAL CENTRIFUGAL SEMISUBMERSED PUMPS

POMPES CENTRIFUGES VERTICALES SEMISUMERSIBLES




pumps

pumpen

azcue


bombas

pompes

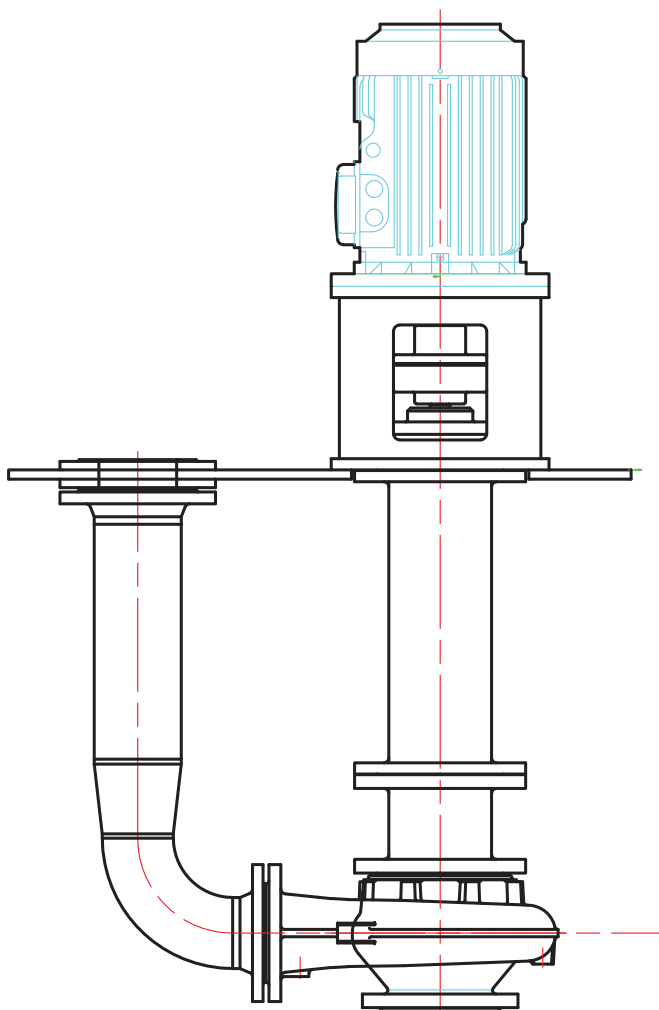

Nomenclatura / Description / Denomination

VSS – 150 / 250

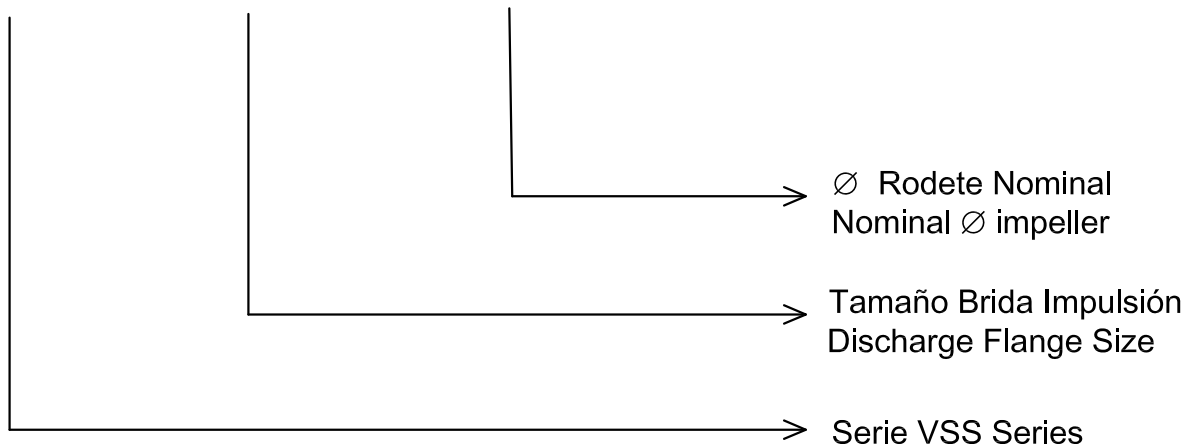

DESCRIPCIÓN

Bomba centrífuga vertical semi-sumergible con cuerpo de bomba radial y rodete de una etapa. Dependiendo del líquido a bombear, el material del cuerpo de la bomba puede ser cambiado al igual que el rodete, que será de diseño abierto o cerrado.

Bomba suministrada con base / soporte en acero que sujeta la bomba y la tubería de la misma.

DESCRIPTION

Vertical semi-submersible centrifugal pump with radial pump body and single stage impeller. Depending on the liquid to be pumped the pump body material can be changed and the impeller as well, to be open or close design.

Pump delivered with a steel base / support that holds the pump and the pump piping.

APLICACIONES/SERVICIOS

- + Agua salada
- + Agua de refrigeración
- + Pinturas
- + Engrase
- + Glicol
- + Aceite lubricante
- + Aceite de corte
- + Agua caliente
- + Agua y pintura
- + Agua y arena
- + Condensados

APPLICATIONS/SERVICES

- + Sea water
- + Cooling water
- + Paints
- + Greasing
- + Glycol
- + Lubricating oil
- + Cutting oils
- + Hot waters
- + Water and paint
- + Water and sand
- + Condensates

MAXIMAS CONDICIONES DE TRABAJO

	50 Hz	60 Hz
Max. caudal (m ³ /h)	1200	1400
Max. altura total (m)	120	140
Temp. max. operación (°C)	100	100
Max. presión (bar)	14	16


MAXIMUM WORKING CONDITIONS

	50 Hz	60 Hz
Max. capacity (m ³ /h)	1200	1400
Max. total head (m)	120	140
Operating max. temp. (°C)	100	100
Max. pressure (bar)	14	16




azcue
pumps


1450 min⁻¹

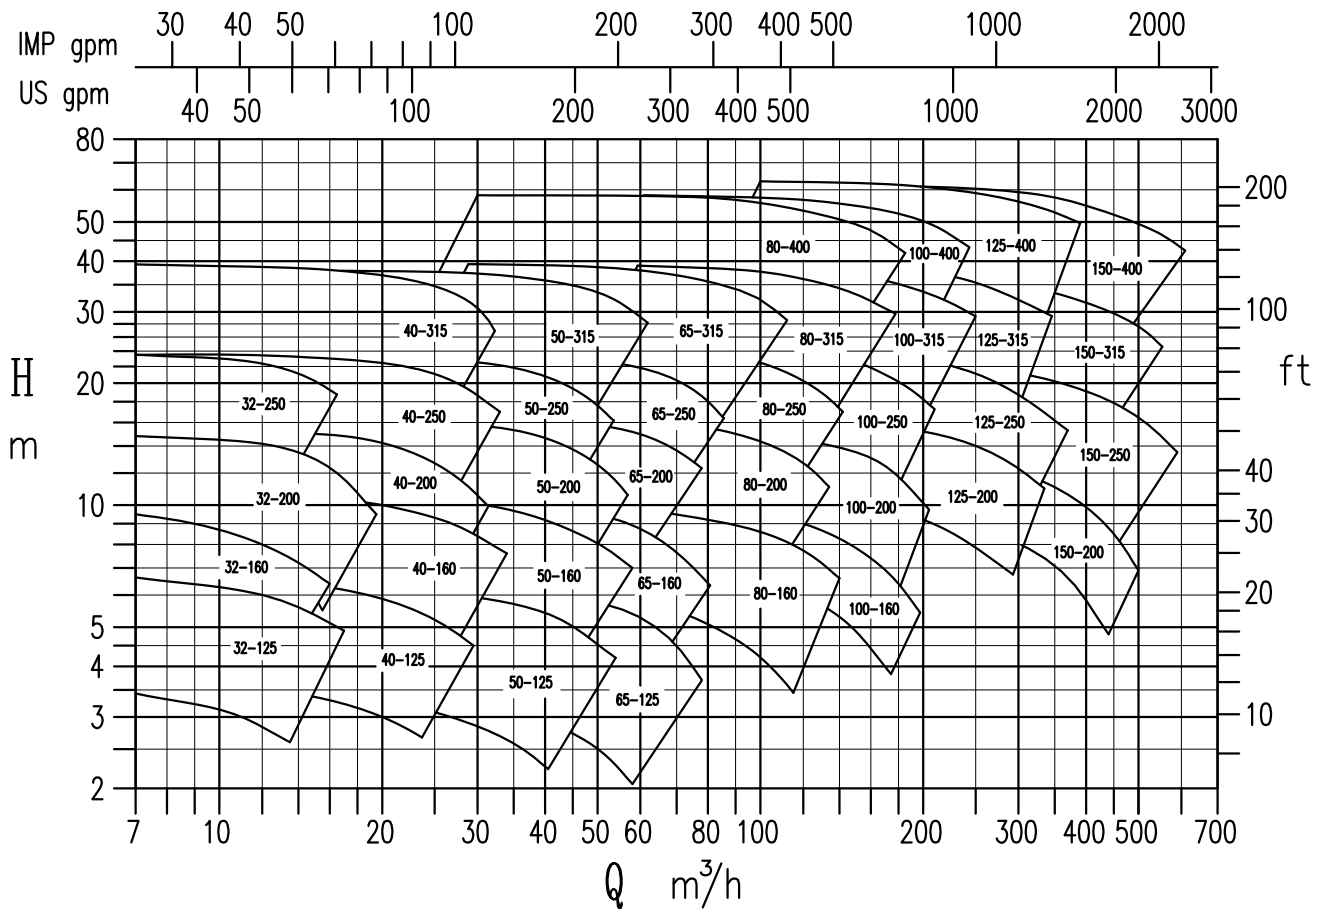


2900 min⁻¹

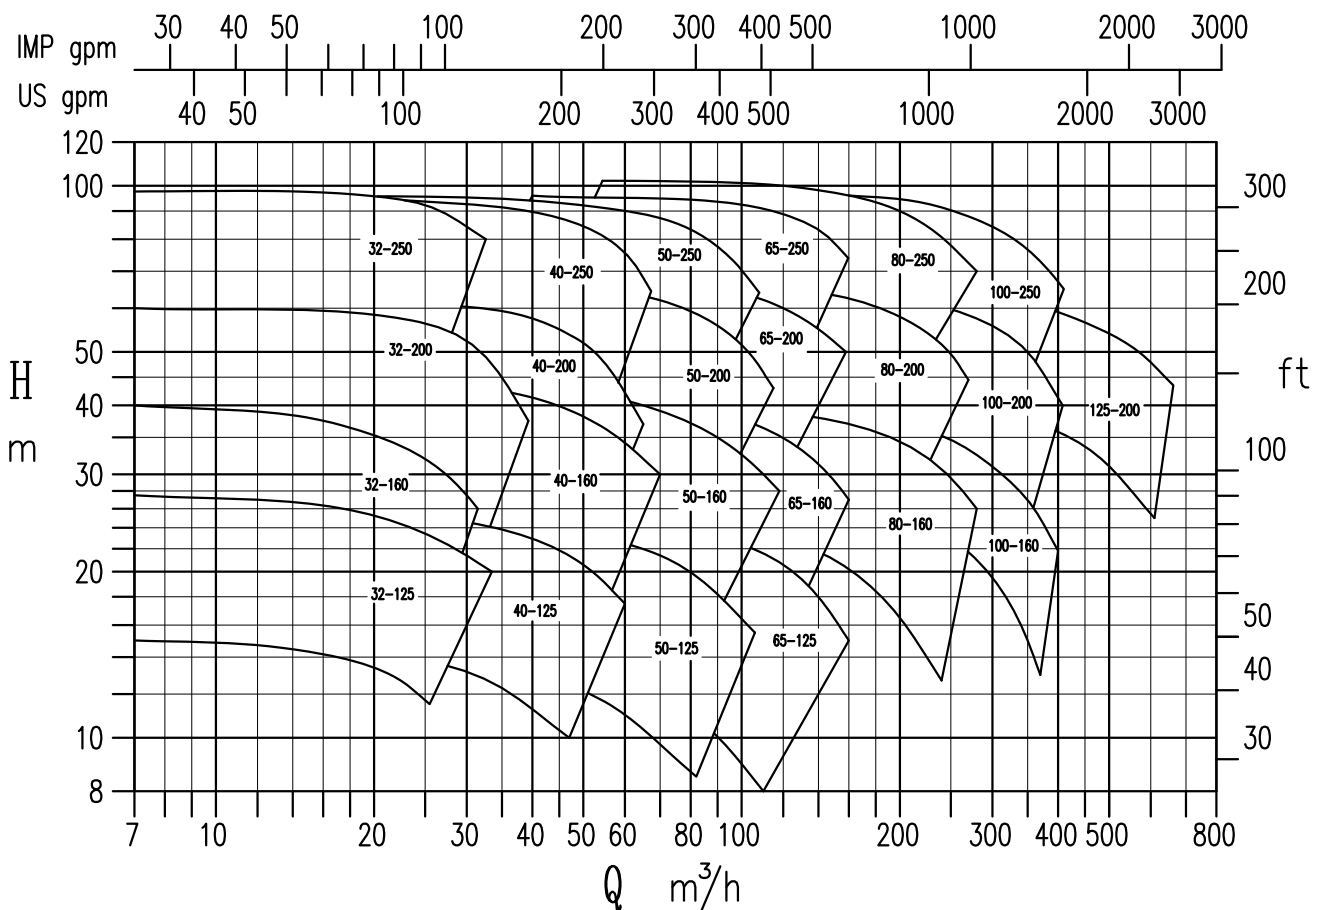

1750 min⁻¹

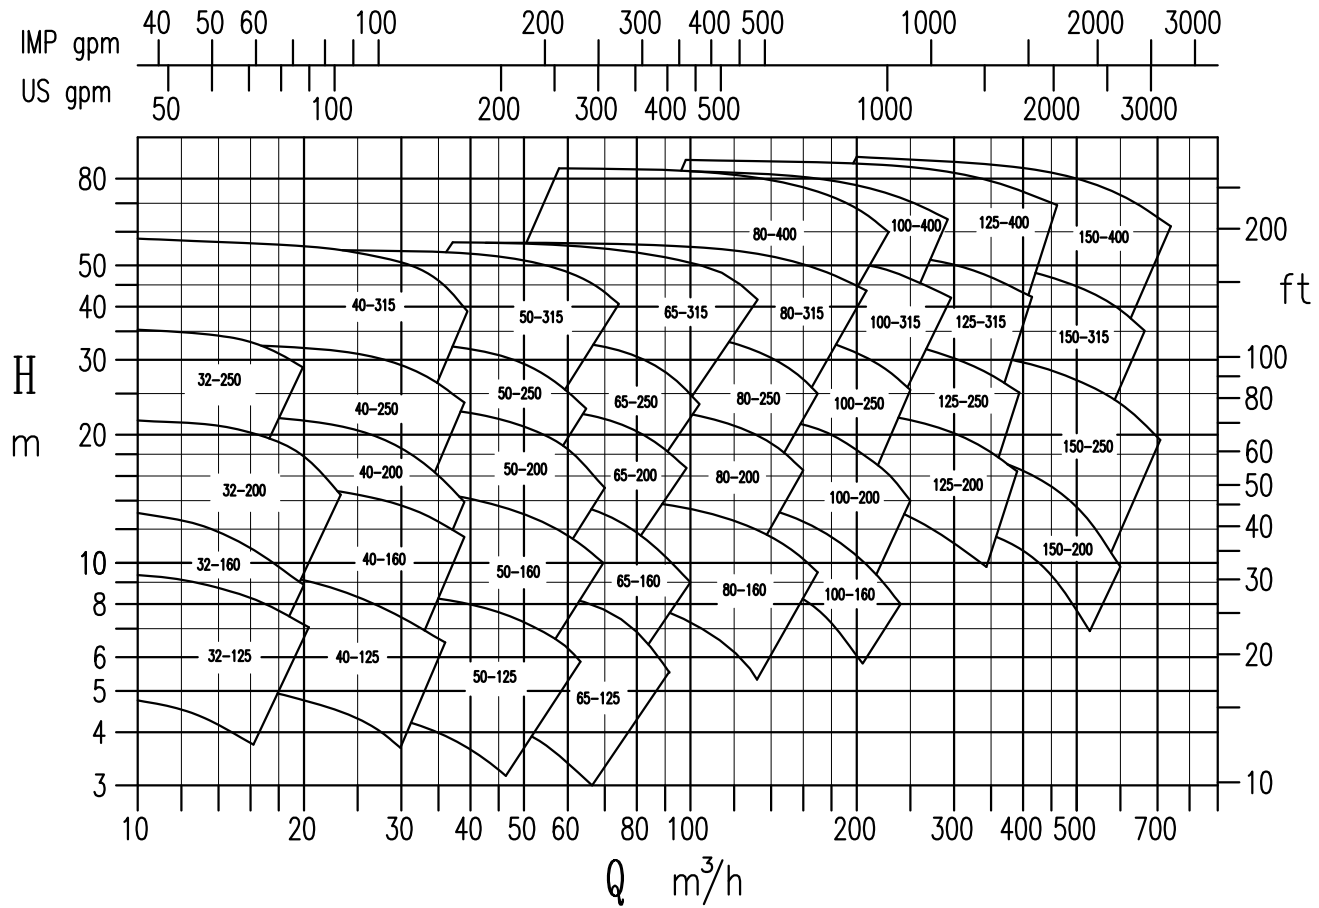

3500 min⁻¹


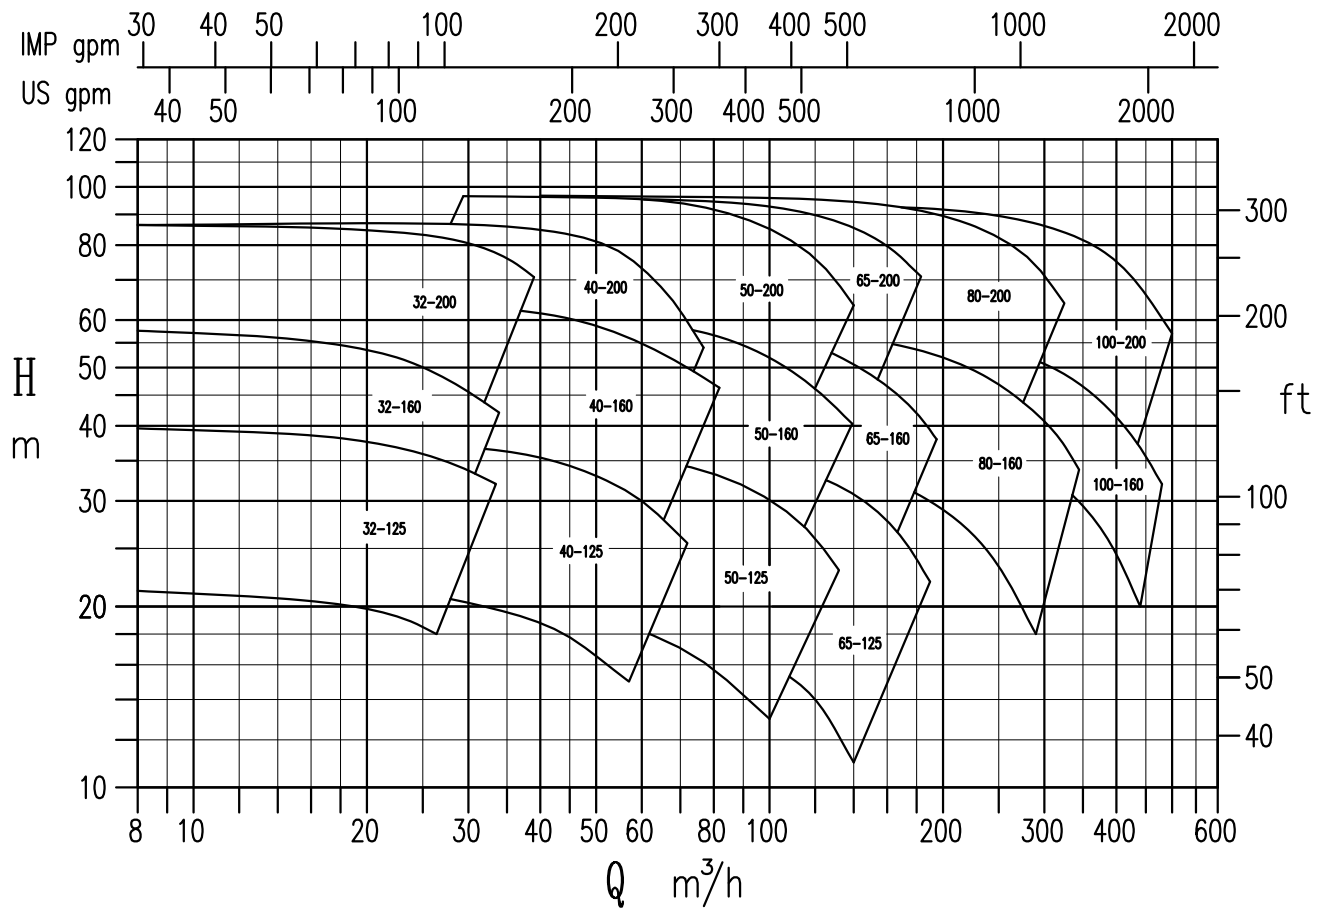




azcue

Serie VSS Series

Ref. VSS-965

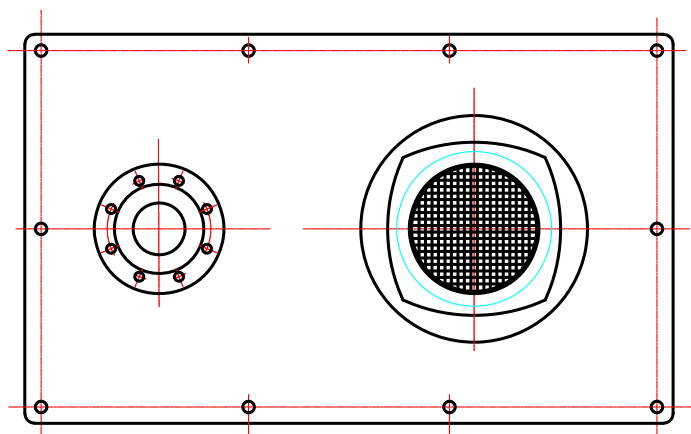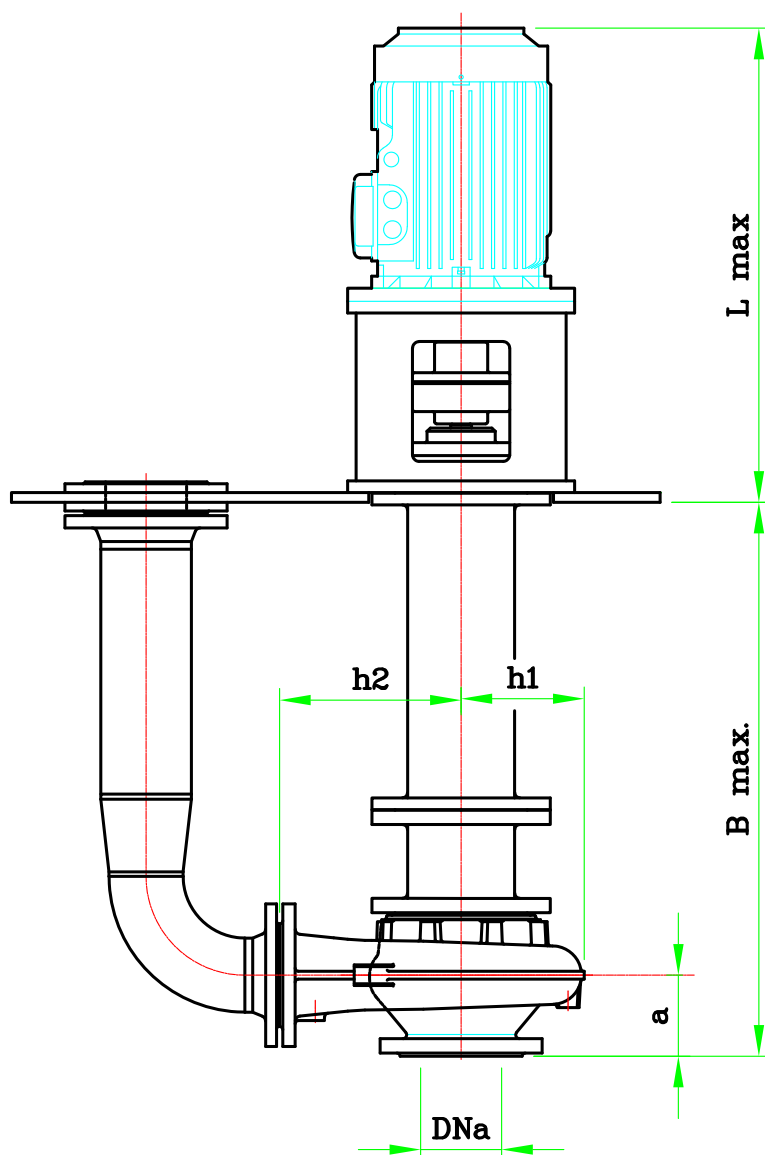

Tipo / Type	DNa	a	h1	h2	B max.	L max.
32-160	50	80	113	160	1754	620
32-200	50	80	135	180	1754	800
32-250	50	100	173	225	1774	800
40-125	65	80	105	140	1754	620
40-160	65	80	124	160	1754	800
40-200	65	100	145	180	1774	830
40-250	65	100	170	225	1774	935
40-315	65	125	197	250	1878	810
50-125	65	100	118	160	1774	800
50-160	65	100	138	180	1774	830
50-200	65	100	154	200	1774	935
50-250	65	100	176	225	1774	1000
50-315	65	125	207	280	1903	810
65-125	80	100	131	180	1774	800
65-160	80	100	145	200	1774	830
65-200	80	100	164	225	1774	935
65-250	80	100	189	250	1774	1010
65-315	80	125	218	280	1903	810
80-160	100	125	154	225	1774	935
80-200	100	125	171	250	1903	1230
80-250	100	125	196	280	1903	1230
80-315	100	125	230	315	1903	1010
80-400	100	125	275	355	2020	1230
100-160	125	125	197	280	1903	1010
100-200	125	125	191	280	1903	1230
100-250	125	140	204	280	1918	1230
100-315	125	140	242	315	1918	1010
100-400	125	140	275	355	2035	1230
125-200	150	140	211	315	1918	1230
125-250	150	140	248	355	1918	1230
125-315	150	140	275	400	2035	1610
125-400	150	140	310	400	2035	1610
150-200	200	160	280	400	1938	1230
150-250	200	160	280	400	1938	1230
150-250	200	160	262	400	1938	1230
150-315	200	160	295	400	2055	1610
150-400	200	160	325	450	2055	1610